

## Features

**Fire alarm control panel designed specifically for suppression release operation with:**

- Four initiating device circuits (IDCs)
- Two notification appliance circuits (NACs)
- Two releasing appliance circuits (RACs)
- Two special purpose monitor inputs (SPMs) that accept manual release request and manual abort request for Agent Release systems, and waterflow and supervisory for Preaction or Deluge systems
- Three auxiliary relays with selectable functions
- Easily selected activity timing options

**Suppression release operation includes:**

- Automatic extinguishing release
- Deluge and preaction sprinkler system release
- Dual or single hazard area protection
- Combined agent release *and* preaction operation\*\*
- *IDCs* are selectable for cross-zoning or for activation from a single detection input
- Short circuit RAC supervision
- Compatible with Listed/Approved 24 VDC or 2, 12 VDC series connected actuators

**Audible Escalation of Events:**

- Single Audible Appliance Tone: Stage 1 activates Temporal or 20 bpm March Time pattern; Stage 2 activates 120 bpm March Time pattern to indicate release timer active; Release activates On Steady to indicate release timer expired and actuator is activated
- *Dual Audible Appliance Control\*\** (Single Hazard): RAC 2 provides a third NAC for dedicated Stage 1 Bell control; NACs 1 & 2 indicate release as On Steady

**Operator interface provides:**

- Status LEDs per circuit for Alarm, Trouble, and Supervisory (where appropriate)
- Acknowledge, Alarm Silence, and System Reset
- Operating mode selection and timer selections when in programming mode

**Related system components:**

- Coil supervision module A2081-9046, one per RAC
- Maintenance Switch, one per RAC
- Abort Switch


**Listed to:**

- UL Standard 864 and ULC Standard S527

## Introduction

**Dedicated for Suppression Release.** 4004R Suppression Release Panels provide conventional fire alarm control circuits and are equipped with the features required for a wide variety of single or dual hazard suppression release applications. Capabilities include automatic extinguishing agent release and deluge and preaction sprinkler control.

\*\* Requires Software Revision 4.01 or higher.

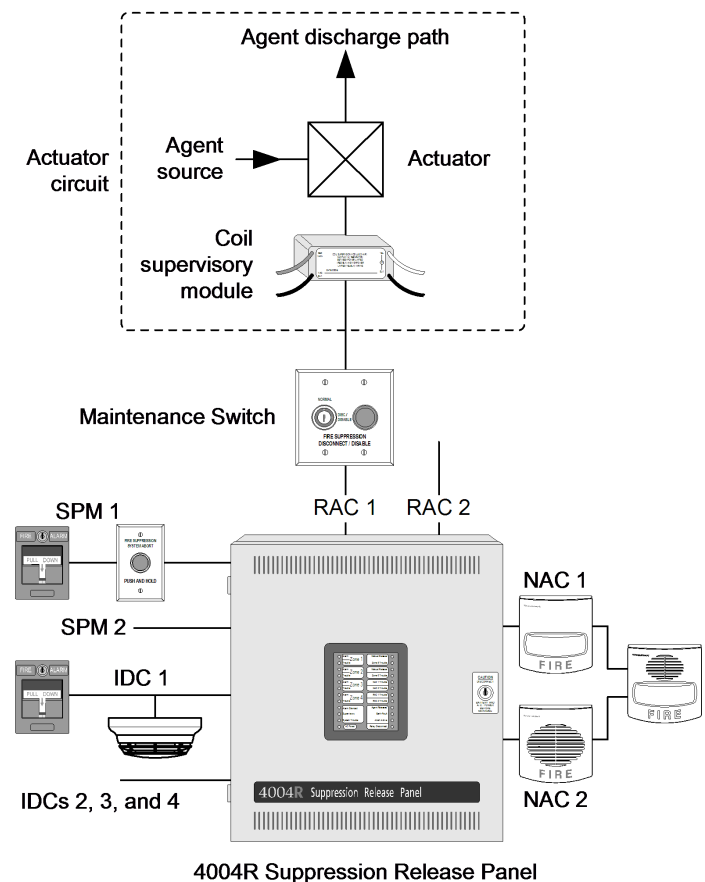

**Figure 1: 4004R Suppression Release Panel One-Line System Reference Drawing**

**Flexible I/O Capabilities.** Four IDCs allow for either four separately monitored zones or two, cross-zoned connections. Two SPMs allow dedicated manual inputs for release or abort; for waterflow and supervisory, or release/abort and pressure, depending on system type. Two releasing appliance circuits (RACs) supervise to the actuator coils and activate the actuators when required. The two NACs and the three panel auxiliary relays provide status condition information.

**Easy Program Selections.** The operator panel has a program mode that allows selection of panel operation type and detailed operating selections using an easily selected sequential programming operation.

**History Log.** The last 50 events are stored in non-volatile memory. This information is accessed by connecting a technician's computer to the service port which is also used to set the date and time.

## Panel Feature Description

**Operator Panel.** The operator panel has alarm and trouble status indicating LEDs for each input and output, visible through the locking cabinet door (refer to [Operator Panel Function](#)). Unlocking the door provides access to the Acknowledge, Alarm Silence, and System Reset pushbutton switches.

(Refer to [Specifications](#) for more information.)

**Four Class B IDCs** provide coverage for either two cross-zoned areas or four separately zoned areas. IDCs are capable of supporting up to 30 Autocall current-limited smoke detectors or electronic heat detectors (see [Reference Information, Compatible Autocall Detectors and other](#)

## 4004R Suppression Releasing Panel for Automatic Extinguishing, Deluge and Preaction Sprinkler Control

[System Components](#)) as well as manual stations and other compatible contact closure initiating devices. IDCs are capable of Class A operation with an optional adapter module and can be programmed as Style C (short or open initiates a trouble) for use with current limited devices only. Single hazard agent release applications monitor pressure switches with IDC 3 and tamper switches with IDC 4.

**Two Class B Special Purpose Monitoring Circuits (SPMs)** are dedicated for manual release or abort, waterflow and supervisory, or release/abort and pressure, depending on system type. Inputs are normally open switches. An abort switch stops release while activated and upon deactivation, the release operation occurs after a selectable time delay. Manual release inputs override abort switches and activate the release after selectable delays of from 0 to 30 seconds in 5 second increments. For Dual Hazard applications, current limited abort operation is required. SPMs are programmable as Style C and capable of Class A operation with the optional adapter module.

**Two Class B NACs** are provided for reverse polarity, notification appliance operation, each rated 2 A. Class A operation is available with the optional adapter module. NAC operation is selectable per application. Synchronized strobe operation requires a separate A4905 Series Strobe Synchronization Module (see [Product Selection](#)), and a continuous, steady-on (non-coded) input from the NAC.

**Two Class B Releasing Appliance Circuits (RACs).** Rated 2 A each, these circuits are dedicated to operating release control actuators. RAC cutout timing is selectable as no cutout, 45 seconds, or 1, 3, 3.5, 4, 5, 6, 7, 21, 25, 34, 44, or 64 minutes. For bell/horn/strobe single hazard applications, RAC 2 functions as a third NAC (NAC 3).

**Auxiliary Power Output.** Two sets of output terminals are provided, one for continuous operation and the other for resettable operation, rated for 750 mA combined. Resettable terminals are provided for 4-wire smoke detector power.

**Standard Panel Auxiliary Relay Outputs.** Three relay outputs are available, selectable as normally open or normally closed, rated 2 A @ 30 VDC, 0.35 p.f. inductive:

**Aux Relay 1 (Trouble)** is energized when Normal and is de-energized with a common Trouble condition.

**Aux Relays 2 and 3** respond differently depending on the system type and whether single or dual hazard. Typical functions are:

**For Single Hazard Operation,** Aux Relay 2 is the common Alarm relay. Aux Relay 3 can be selected to indicate pre-discharge (release time delay started), common supervisory, waterflow, or pressure switch relay, depending on the system type.

**For Dual Hazard Operation,** Aux Relay 2 is for Hazard Area 1 common Alarm; Aux Relay 3 is for Hazard Area 2 common Alarm.

**Power Supply and Battery Charger.** During alarm, the power supply provides 3 A at 25.5 VDC, filtered and regulated. The temperature compensated battery charger provides 27.5 VDC for charging batteries up to 12.7 Ah, suitable for up to 90 hour standby and 10 minutes of alarm. A A4081 Series external battery cabinet with charger can be used for more battery backup (see battery selection below).

### Expansion Modules and Accessories

**Auxiliary Relay Module A004-9860** provides four additional relays. Dual hazard applications will require two modules for auxiliary relay operation. Each relay module has a manual disconnect switch that controls relays 2 through 4. (Trouble Relay 1 is not controlled.) Relay outputs are required to be connected to a 15 A maximum circuit breaker. (Relay specifications are detailed in [Specifications](#).)

### Auxiliary Relay Module Operation:

**Relay 1** activates on a common **trouble** associated with its hazard or a system trouble.

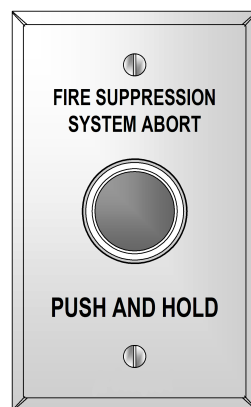


Figure 2: Abort Switch

**Relay 2** activates on a common **alarm** associated with its hazard.

**Relay 3, selected for original operation,** activates for pressure switch, waterflow switch, or release timer as required per application type (hazard specific), or activates with the second zone for cross-zoned systems (hazard specific). "Original" operation allows direct panel replacement if required.

**Relay 3, selected for enhanced operation,** (software 4.01 or higher), activates to indicate pre-discharge, supervisory, or waterflow (application specific).

**Relay 4** activates when the hazard specific RAC activates or with pressure switch input (application specific).

**Dual Circuit Class A Adapter Module A004-9864.** This module converts two Class B circuits to Class A operation. It consumes no additional current and is compatible with IDCs, SPMs, and NACs. Up to four modules may be mounted within the 4004R cabinet.

**Abort Switches.** For manual abort requests, these abort switches are available with or without a built-in 1.2 kΩ, 1 W resistor and are mounted on single-gang stainless steel plates. Abort switches are connected to the SPM inputs per system requirements.

Activity abort occurs while the switch is pushed and continues after releasing the switch for the selected Abort Release Time Delay.

**Maintenance Switch.** Proper service of release appliance circuits requires the ability to securely disconnect the release circuit during installation and maintenance. Autocall maintenance switches are controlled by keyswitch and initiate a supervisory condition when in disconnect/disable position. Models with lamp are on a double-gang plate and are powered from separate 24 VDC wiring. Mounting is on stainless steel plates and models are available as either surface or flush mount.

For additional Maintenance and Abort Switch information refer to data sheet [AC2080-0010](#).



Figure 3: Maintenance Switch

## 4004R Suppression Releasing Panel for Automatic Extinguishing, Deluge and Preaction Sprinkler Control

### Product Selection

**Table 1: Release Control Panels**

| SKU       | Color | Listings | Description   |
|-----------|-------|----------|---|
| A004-9301 | Beige | UL, ULC  | Basic Releasing Panel; operates with AC input of: 120/220/230/240 VAC, 50/60 Hz (auto-select); includes: four IDCs, two NACs, two SPMs, two RACs, 3 auxiliary relays, 3 A power supply with battery charger, and NEMA 1/IP30 rated cabinet and door |
| A004-9302 | Red   | UL, ULC  |   |

**Table 2: Expansion Modules**

| SKU       | Description  | Reference    |                    |
|-----------|--|--------------|--------------------|
| A004-9860 | Auxiliary Relay Module; four dual contact relays selectable as N.O. or N.C.; rated 7 A @ 120 VAC resistive, 5 A @ 30 VDC, 0.35 p.f. inductive; unsupervised contacts | Two maximum  | Select as required |
| A004-9864 | Two Circuit Class A Adapter Module for IDCs, SPMs, or NACs   | Four maximum |                    |

**Table 3: System Batteries**

| SKU       | Description          | Reference   |
|-----------|----------------------|---|
| 2081-9272 | 6.2 Ah battery, 12 V | These batteries can be mounted in the 4004R cabinet; select one battery model per system standby requirements; two batteries are required |
| 2081-9274 | 10 Ah battery, 12 V  |   |

**Table 4: Release Control Systems Accessories**

| SKU          | Description   |
|--------------|---|
| A2081-9046   | Coil Supervision Module, <b>one required per RAC</b>  |
| A2081-9048   | Abort Supervision Module; encapsulated 560Ω, 1/2 W resistor; for Dual Hazard SPM; allows non-current limited Abort and Manual Release stations to be on same circuit                  |
| A4081 Series | End-of-Line Resistor Harnesses; refer to data sheet <i>AC4081-0003 A4081 Series End-of-Line Resistor Harnesses</i>  |
| A2099 Series | Manual Stations for Releasing Applications; refer to data sheet <i>AC2099-0010 Non-Coded Manual Stations for Releasing Applications</i>   |
| A4905-Series | Strobe synchronization modules; A4905-9914 for Class B, A4905-9922 for Class A; see data sheet <i>AC4905-0003 SmartSync Control Module Strobe Synchronization Modules</i> for details |

### Reference Information, Compatible Autocall Detectors and other System Components

**Table 5: Reference Information, Compatible Autocall Detectors and other System Components**

| SKU          | Type  |                     | Data Sheet  |
|--------------|---|---------------------|---|
| A4098-9601   | Standard detector   |                     | Photoelectric smoke detectors for 2-wire and 4-wire bases<br><i>AC4098-0015</i>                               |
| A4098-9605   | Reduced sensitivity detector  |                     |   |
| A4098-9602   | Combination smoke and heat detector   |                     |   |
| A4098-9612   | 135°F (57°C)  | Fixed heat detector | Electronic heat detectors for 2-wire and 4-wire bases<br><i>AC4098-0014</i>                                   |
| A4098-9614   | 200°F (93°C)  |                     |   |
| A4098-9613   | 135°F (57°C)  |                     |   |
| A4098-9615   | 200°F (93°C)  |                     |   |
| A2099-9149   | Standard  |                     | Manual Release Station with selectable release labels; double action push, N.O. contact<br><i>AC2099-0010</i> |
| A2099-9152   | Style C, with 560 Ω internal resistor   |                     |   |
| A2080-Series | Maintenance Switches, flush or surface mount; indicator lamps require 24 VDC wiring     |                     | <i>AC2080-0010</i>  |
|              | Abort Switches, surface or flush mount; available standard or with 1.2 kΩ, 1 W resistor |                     |   |

## 4004R Suppression Releasing Panel for Automatic Extinguishing, Deluge and Preaction Sprinkler Control

### Programming Modes and Selection Choices

| Sequence                                       | Select <u>one</u> of 13 Application Modes (numbered 1 through 13 in italics) |               |             |  |                                  |   |
|--|--|---------------|-------------|--|----------------------------------|---|
| 1  | Agent Release  | Single Hazard |             | Cross-Zoned  | 1                                | Combined Release (RACs activate together) |
|  |  |               |             | Either Zone  | 2                                |   |
|  |  | Dual Hazard   |             | Cross-Zoned  | 3                                | Independent Release (RACs are separate)   |
|  |  |               |             | Either Zone  | 4                                |   |
|  | Preaction/Deluge   | Single Hazard |             | Cross-Zoned  | 5                                | Combined Release (RACs activate together) |
|  |  |               |             | Either Zone  | 6                                |   |
|  |  | Dual Hazard   |             | Cross-Zoned  | 7                                | Independent Release (RACs are separate)   |
|  |  |               |             | Either Zone  | 8                                |   |
|  | Agent Release; Single Hazard   |               | Cross-Zoned | 9  | NYC Abort (not UL listed)        |   |
|  | Agent Release & Preaction; Single Hazard                                     |               | Cross-Zoned | 10   | RAC 2 provides Preaction Control |   |
| Either Zone                                    |  |               | 11          |  |                                  |   |
| Agent Release, Bell/Horn/Strobe; Single Hazard |  | Cross-Zoned   | 12          | RAC 2 operates as NAC 3 for Stage 1 Bell Control (separate sound from release alarm) |                                  |   |
|  |  | Either Zone   | 13          |  |                                  |   |

| Sequence | Programming Mode Description                     |                                   | Description   |
|----------|--|-----------------------------------|---|
| 2        | Select Relay Operation for Application Modes 1-9 |                                   | Select "Original" operation mode or "Enhanced" mode (refer to <a href="#">Expansion Modules and Accessories</a> for details)  |
| 3        | IDC and SPM Circuit Style                        |                                   | Class B/Class A or Style C  |
| 4        | Automatic Release Time Delay                     |                                   | Selectable in 5 second increments from 0 to 60 seconds (default is 60 seconds)  |
| 5        | RAC Cutout Timer                                 |                                   | No cutout, 45 seconds, or 1, 3, 3.5, 4, 5, 6, 7, 21, 25, 34, 44, or 64 minutes  |
| 6        | Manual Release Time Delay                        |                                   | 0, 5, 10, 15, 20, 25, or 30 seconds   |
| 7        | Abort Release Time Delay                         | UL Standard 864 listed            | Immediate or 10 seconds remaining   |
|          |  | <b>Not UL Standard 864 listed</b> | <b>IRI abort (cross-zoned systems only), NYC abort, or original release delay</b>   |
| 8        | NAC Coding (where selectable)                    |                                   | Temporal pattern or 20 beats per minute (first cross-zone alarm)  |
| 9        | NAC Operation                                    | Standard Operation                | No inhibit or one minute inhibit selected as: both on until silence, NAC 1 on until reset and NAC 2 on until silence, or both on until reset  |
|          |  | Pre-Discharge Operation           | <b>Note:</b> For Halon 1301, Halon 1211, or clean agent release, a pre-discharge NAC must be configured to warn of impending discharge, the release timer selects the duration of the pre-discharged signal |
| 10       | Supervisory Latching                             |                                   | Latching or non-latching  |
| 11       | Supervisory Notification                         |                                   | LED and tone-alert only, or with: NAC 2 also on; Aux Relay 3 also on; or both NAC 2 and Aux Relay 3 also on   |

### Release Control System

**PLEASE NOTE:** Proper operation of release control systems requires that the system design, installation, and maintenance be performed correctly and in accordance with all applicable local and national codes, and equipment manufacturer's instructions. No liability for total system operation is assumed or implied.

**Automatic Extinguishing Release Systems** automatically activate actuators for the release of a fire extinguishing agent (dry chemical, water spray, foam, CO2, Clean Agent, etc.) in response to fire detection device input.

**Automatic Extinguishing Release Systems with Separate Bell Control (single hazard)** (SW rev. 4.01 or higher). RAC 2 operates as a bell control NAC. When cross-zoned, stage 1 alarm activates the bell until the release timer starts. When not cross-zoned, stage 1 alarm activates the bell until expiration of the release timer. In both cross-zoned and non cross-zoned applications, NAC 2 may be programmed to indicate either a tamper switch supervisory condition or the start of the release timer using a cadence pattern operation.

**UL and FM Extinguishing Release System Panels must have** a minimum of 24 hours of standby power. Initiating devices must be Listed/Approved for the application, and may be wired either Class A or B. Actuators must be electrically compatible with the control panel circuits and power supplies, and are wired Class B to provide coil supervision.

**Deluge and Preaction Sprinkler Systems** automatically activate water control valves in response to fire detection device input.

**Deluge Sprinkler Systems** employ open sprinkler heads and provide water flow when the fire detection system activates a common automatic water control valve. They are used to deliver water simultaneously through all of the open sprinkler heads. This type of system is applicable where the immediate application of large quantities of water over large areas is the proper fire response.

**Preaction Sprinkler Systems** are similar to deluge systems except that normally closed sprinkler heads are used and supervisory air pressure is maintained in the pipe. Operation requires both an activated sprinkler head and an activated fire alarm initiating device.

**Combined Agent Release and Preaction Systems** provides agent release *and* preaction control. (Available with software revision 4.01 or higher.) For applications where agent release may not be sufficient for fire control, sprinklers are put in preaction mode to allow waterflow to continue the fire response. (Preaction is assumed. The sprinkler installation determines the selected deluge. Panel operation is the same.)

## 4004R Suppression Releasing Panel for Automatic Extinguishing, Deluge and Preaction Sprinkler Control

**UL requirements** for Fire Alarm Systems Listed for Automatic Release or Deluge and Preaction Sprinkler Systems are the same as described above for Automatic Extinguishing Release Systems.

**FM Approved requirements** for Fire Alarm Systems for Automatic Release of Deluge and Preaction Sprinkler Systems require operation of specific compatible FM Approved Automatic Water Control Valves, a minimum secondary power capacity of 90 hours, and all circuits for the automatic release initiating devices must be capable of operation during a single open circuit fault condition (Class A).

### Release Control System Requirements

1. Actuators are connected as two-wire, Class B notification/releasing circuits **with only one 24 VDC actuator per circuit** to ensure supervision. Where applicable, two, 12 VDC actuators in series, or one 12 VDC actuator and a manufacturer supplied series resistor may be used.
2. Coil Supervision Module, model A2081-9046, must be wired electrically before the actuator and located in the actuator wiring junction box. (See [4004R System Connection](#).)
3. For UL Listed Automatic Extinguishing Release valves and actuators, refer to [Compatible UL Listed Valves and Actuators](#).
4. For FM Approved Automatic Extinguishing Release, secondary standby must be a minimum of 24 hours with 5 minutes of alarm. Actuators must be electrically compatible.
5. For FM Approved Deluge and Preaction Sprinkler operation: IDCs must be Class A, wired to Listed/Approved devices; secondary standby capacity must be a minimum of 90 hours with 10 minutes of alarm; and the specified compatible Automatic Water Control Valves/Actuator must be used. (See [FM Approved Water Control Valves](#).)
6. Power supply loading and wiring distances must be per *4004R Fire Alarm Installation, programming, and operating instructions 579-354AC*.
7. Battery standby must be selected for proper actuator operation and may require a minimum voltage of 23 VDC depending on the actuator. Detailed battery calculation reference information is contained in *4004R Fire Alarm Installation, programming, and operating instructions 579-354AC*.
8. Maintenance Switches, one per RAC, are required per NFPA 72, the *National Fire Alarm and Signaling Code*, to allow the system to be tested or serviced without actuating the fire suppression systems. ***Their use may not be allowed in some jurisdictions, always confirm local requirements.*** When used, Autocall Maintenance Switches are required to ensure that operation initiates a supervisory condition.

### Additional System Device Information

1. Autocall Abort Switches are available when abort operation is required. When used, wire on Special Purpose Monitoring Circuits (SPMs) as Class A or Class B; Autocall model Abort Switches are required.
2. Manual Release Stations are used for direct activation of the release actuators with the appropriate time delay implemented by the fire alarm control panel.

### Additional Information

This data sheet is a summary of the extensive operating features and options available with the 4004R Release Control Panel. Complete details are covered in the *4004R Installation, Programming, and Operating Instructions* manual (publication 579-354AC) shipped with each 4004R. Compatible system devices are listed in [Reference Information, Compatible Autocall Detectors and other System Components](#). For general information, refer to *Factory Mutual Research Corporation (FMRC) "FMRC Approval Guide," FM Approval standard "Deluge Systems and Preaction Systems."*

### Specifications

Refer to [4004R System Connection](#) and Instructions 579-354AC for additional information

**Table 6: Power Ratings**

| Specifications      |                 | Rating   |
|---------------------|-----------------|--|
| AC Input            | Voltage Ratings | 120 VAC, 60 Hz; 220/230/240 VAC, 50/60 Hz, auto-select   |
|                     | Current Ratings | 2 A maximum @ 120 VAC input; 1 A maximum @ 240 VAC input   |
| Power Supply Output |                 | 3 A maximum available for external loads   |
| Battery Charger     |                 | Temperature compensated, capable of recharging batteries required for 90 hour standby and 10 minute alarm (contingent on auxiliary power load) |
| Standby Current     |                 | 100 mA; with IDCs fully loaded, tone-alert silenced, trouble LED on, charger off   |
| Alarm Current       |                 | 264 mA + external loads; (2 zones in alarm & 2 internal relays, NACs and RACs on)  |

**Table 7: Standard Circuit Ratings**

| Circuit                                    | Rating         | Current  |
|--|----------------|--|
| Initiating Device Circuits (IDCs)          | Supervisory    | 3 mA maximum; 3.3 k $\Omega$ end-of-line resistor per circuit  |
|  | Alarm Current  | 75 mA maximum  |
|  | Output Voltage | 28 VDC maximum   |
|  | Capacity       | Each IDC supports up to 30 detectors (smoke or electronic heat) and manual stations as required; wiring distance is limited to 50 $\Omega$ maximum |
| Special Purpose Monitoring Circuits (SPMs) | Application    | For Manual Release, Abort Switches, or Supervisory functions only; not for detectors; wiring distance is limited to 50 $\Omega$ maximum            |



## 4004R Suppression Releasing Panel for Automatic Extinguishing, Deluge and Preaction Sprinkler Control

**Table 7: Standard Circuit Ratings**

| Circuit  | Rating                         | Current  |
|--|--------------------------------|--|
|  | For Dual Hazard Applications   | Dual Hazard Application Abort Switches require a current limiting resistor of 1.2 k $\Omega$ , 1 W, or an external Abort Supervision Module per SPM  |
|  | Supervisory                    | 6 mA; 3.3 k $\Omega$ end-of-line resistor per circuit  |
|  | Activated                      | 75 mA maximum  |
|  | Output Voltage                 | 28 VDC maximum   |
| Notification Appliance Circuits (NACs)                                   | Alarm Current                  | Special Application appliance rating = 2 A maximum on a NAC<br><br><b>Note:</b> Special Application appliance rating = full 3 A power supply rating<br>Regulated 24 DC appliance power = 1.5 A maximum on a circuit<br><br><b>Note:</b> Regulated 24 DC <b>strobe</b> load = 1.35 A maximum total for power supply |
|  |                                |  |
|  | Output Voltage                 | Alarm = 26 VDC max.; supervisory = 29 VDC maximum; 10 k $\Omega$ end-of-line resistor  |
| Notification Appliance Reference   | Synchronized Strobe Operation  | Requires NAC dedicated to strobe control with non-coded output; use an external Synch Module (A4905-9914, Class A, or A4905-9922, Class B, see data sheet <b>S4905-0003</b> for details); up to 33 strobes can be synchronized per 4004R   |
|  | Special Application Appliances | Autocall, A4901 Series horns, A4904 and A4906 Series strobes, A4903 Series 4-wire horn/strobes; refer to Installation Instructions 579-354AC for additional details  |
| Release Appliance Circuits (RACs)  | Regulated 24 DC Appliances     | Power for other appliances listed to UL Standard 1971 or UL Standard 464; use associated external synchronization modules where required   |
|  | Output Current                 | 2 A maximum per circuit  |
| Auxiliary Power Output; for loads only                                   | Output Voltage                 | Activated = 26 VDC maximum; non-alarm = 29 VDC maximum; 10 k $\Omega$ end-of-line resistor   |
|  | Special Application            | Two outputs are available, continuous operation or resettable operation; combined output is 750 mA maximum; output voltage = 19.25 to 27 VDC   |
| Auxiliary Relay Outputs (Trouble, Aux Relay 2, Aux Relay 3)              |                                | Contacts rated 2 A @ 30 VDC, 0.35 p.f., inductive, selectable as N.O. or N.C. by jumper  |
| Wiring Connections for Above and AC Input                                |                                | Terminals rated for 18 AWG to 12 AWG (0.82 mm <sup>2</sup> to 3.31 mm <sup>2</sup> )   |
| <b>Note:</b> Total DC current = 3 A maximum; see NAC ratings for details |                                |  |

**Table 8: Auxiliary Module Ratings**

| Module                           | Rating         |
|----------------------------------|----------------|
| Auxiliary Relay Module A004-9860 | Relay Type     |
|                                  | AC Ratings     |
|                                  | DC Ratings     |
|                                  | Module Current |
|                                  | Wiring         |

**Table 9: A2081-9046 Coil Supervision Module and A2081-9048 Abort Supervision Module**

| Specification                          | Rating   |
|--|--|
| Construction                           | Epoxy encapsulated                                       |
| Dimensions                             | 1-3/8" W x 2-7/16" L x 1-1/16" H (34 mm x 62 mm x 27 mm) |
| Wiring                                 | 18 AWG (0.82 mm <sup>2</sup> ) wire leads, color coded   |
| Coil Supervision Module Current Rating | 2 A maximum; internally fused at 3 A, non-replaceable    |
| Abort Supervision Module Resistance    | 560 $\Omega$ , 1/2 W                                     |

**Table 10: Environmental Ratings**

| Specification               | Rating  |
|-----------------------------|---|
| Operating Temperature Range | 32° to 120°F (0° to 49°C)                             |
| Operating Humidity Range    | up to 93% RH, non-condensing @ 100.4°F (38°C) maximum |

### Compatible UL Listed Valves and Actuators

| MFG.      | SKU Number   | Coil Details   | MFG. | SKU Number   |
|-----------|--|----------------|------|--|
| A N S U L | *AUTOMAN II-C Assembly (solenoid 17728; coil 25924)                        | 12 VDC, 458 mA | ASCO | 8210A107 (097617-005D coil) 1/2" NPS, 5/8" orifice, 24 VDC |
|           | AUTOMAN II-C Explosion-Proof Releasing Device (solenoid 31492; coil 31438) | 24 VDC, 467 mA |      | 8210G207 (238310 coil) 1/2" NPS, 1/2" orifice              |

## 4004R Suppression Releasing Panel for Automatic Extinguishing, Deluge and Preaction Sprinkler Control


| MFG.    | SKU Number   | Coil Details      | MFG.           | SKU Number   |
|---------|--|-------------------|----------------|--|
|         | *AUTOMAN II-C Assembly (solenoid 68739; coil 25924)  | 12 VDC, 458 mA    |                | 8211A107 (097617-005D coil) 24VDC  |
|         | Solenoid Electric Actuator (solenoid 73111; coil 73097)  | 24 VDC, 1 A       |                | HV2628571 (23810 coil) N.C. 1/2" NPS, 1/2" orifice   |
|         | *CV90 HF Electric Actuator 73327 (may use 73606 in-line resistor)  | 9 VDC max, 450 mA |                | HV2648581 (23810 coil) N.O. 1/2" NPS, 1/2" orifice   |
|         | LP CO2 w/ASCO solenoid 422934  | 24 VDC, 442 mA    |                | R8210A107 (097617-005D coil) 1/2" NPS, 5/8" orifice  |
|         | LP CO2 double action 24 VDC solenoid 430948  | 24 VDC, 438 mA    | Pyro-Chem      | T8210A107 (097617-005D coil) 1/2" NPS, 5/8" orifice  |
|         | LP CO2 3-way selector valve solenoid 433419  | 24 VDC, 438 mA    |                | ECH Electrical Control Head (551201)   |
|         | Electric Actuator 24 VDC solenoid 570537   | 24 VDC, 250 mA    |                | Explosion-Proof Electric Actuator (570147)   |
| LPG     | Solenoid 26114002 for Solenoid Coupling Assemblies: 21006401 & 21006402; & LPG128/145/190/230-50/55 FM-200 valves; and LPG128-90UL iFLOW & FM-200 valves | 24 VDC, 542 mA    | Star Sprinkler | SKU D deluge valve, with solenoid 5550   |
|         |  |                   | Hygood         | 304.205.010 – Electrical Actuator Suppression Diode  |
|         |  |                   | Minimax        | 304.209.001 – Electrical Actuator Bridge Rectifier   |
| Skinner | 71395SN2ENJ1NOH111C2 (Skinner coil H111C2) 1/4", NPS, 1/16"  |                   |                | * 12 VDC coils, either wire two in series for 24 VDC activation, or, if available from manufacturer, use series resistor |
|         | 73212BN4TN00NOC111C2 (Skinner coil C111C2) 1/2", 5-300 psi   |                   |                |  |
|         | 73212BN4TNLVNOC322C2 (Skinner coil C322C2) 1/2", NPS, 0.92 A, 250 psi  |                   |                |  |
|         | 73218BN4UNLVNOH111C2 (Skinner coil H111C2)   |                   |                |  |
|         | 73218BN4UNLVNOC111C2 (Skinner coil C111C2) 1/2", NPS, 5/8 in. orifice  |                   |                |  |

\* For new applications, LV2LBX25 has been replaced by model number 73218BN4UNLVNOC111C2.

### FM Approved Water Control Valves


| Group | Manufacturer   | SKU Number                  | Details  |
|-------|----------------|-----------------------------|--|
| A     | Skinner        | LV2LBX25*                   | 24 VDC, 11 W, 458 mA, 1/2" NPS, 1/2" orifice   |
| B     | ASCO           | T8210A107                   | 24 VDC, 16.8 W, 700 mA, 1/2" NPS, 5/8" orifice   |
|       |                | R8210A107                   |  |
|       |                | 8210A107                    |  |
| C     | Star Sprinkler | 5550                        | 24 VDC, part of Model D deluge valve   |
| D     | ASCO           | 8210G207                    | 24 VDC, 10.6 W, 440 mA, 1/2" NPS, 1/2" orifice   |
| E     | Skinner        | 73218BN4UNLVNOC111C2*       | 24 VDC, 10 W, 420 mA, 1/2" NPS, 5/8" orifice   |
|       |                | 73212BN4TN00NOC111C2        | 24 VDC, 10 W, 420 mA, 1/2" NPS, 5/8" orifice; 5-300 psi                                  |
| F     | Skinner        | 73212BN4TNLVNOC322C2        | 24 VDC, 22 W, 1/2" NPS, 920 mA, 250 psi (1725 kPa), 1/2" orifice                         |
| G     | Skinner        | 71395SN2ENJ1NOH111C2        | 24 VDC, 10 W, 420 mA, 1/4" NPS, 1/16" orifice, 250 psi (1725 kPa) rated working pressure |
| I     | Victaulic      | Series 753-E solenoid valve | 24 VDC, 8.7 W, 1/2" NPS, 364 mA, 300 psi (2069 kPa), 1/2" orifice                        |
| J     | Viking         | 11591 and 11592             | Normally closed (NC)   |
|       |                | 11595 and 11596             | Normally open (NO)   |
| K     | Viking         | 11601 and 11602             | NC solenoid valve, 24 VDC, 9 W, 1/2" NPS, 250 psi (1725 kPa), 6.2 Cv                     |

## Operator Panel Function

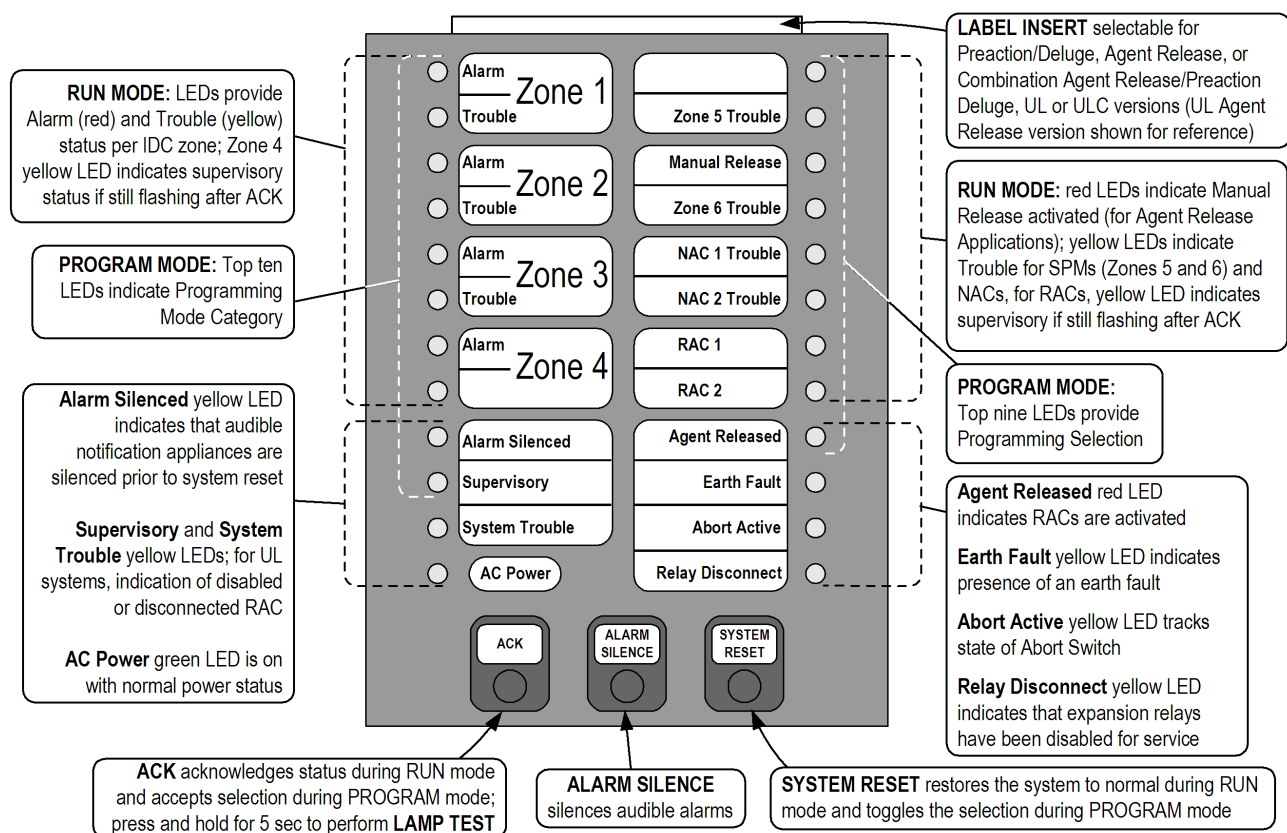



## 4004R System Connection

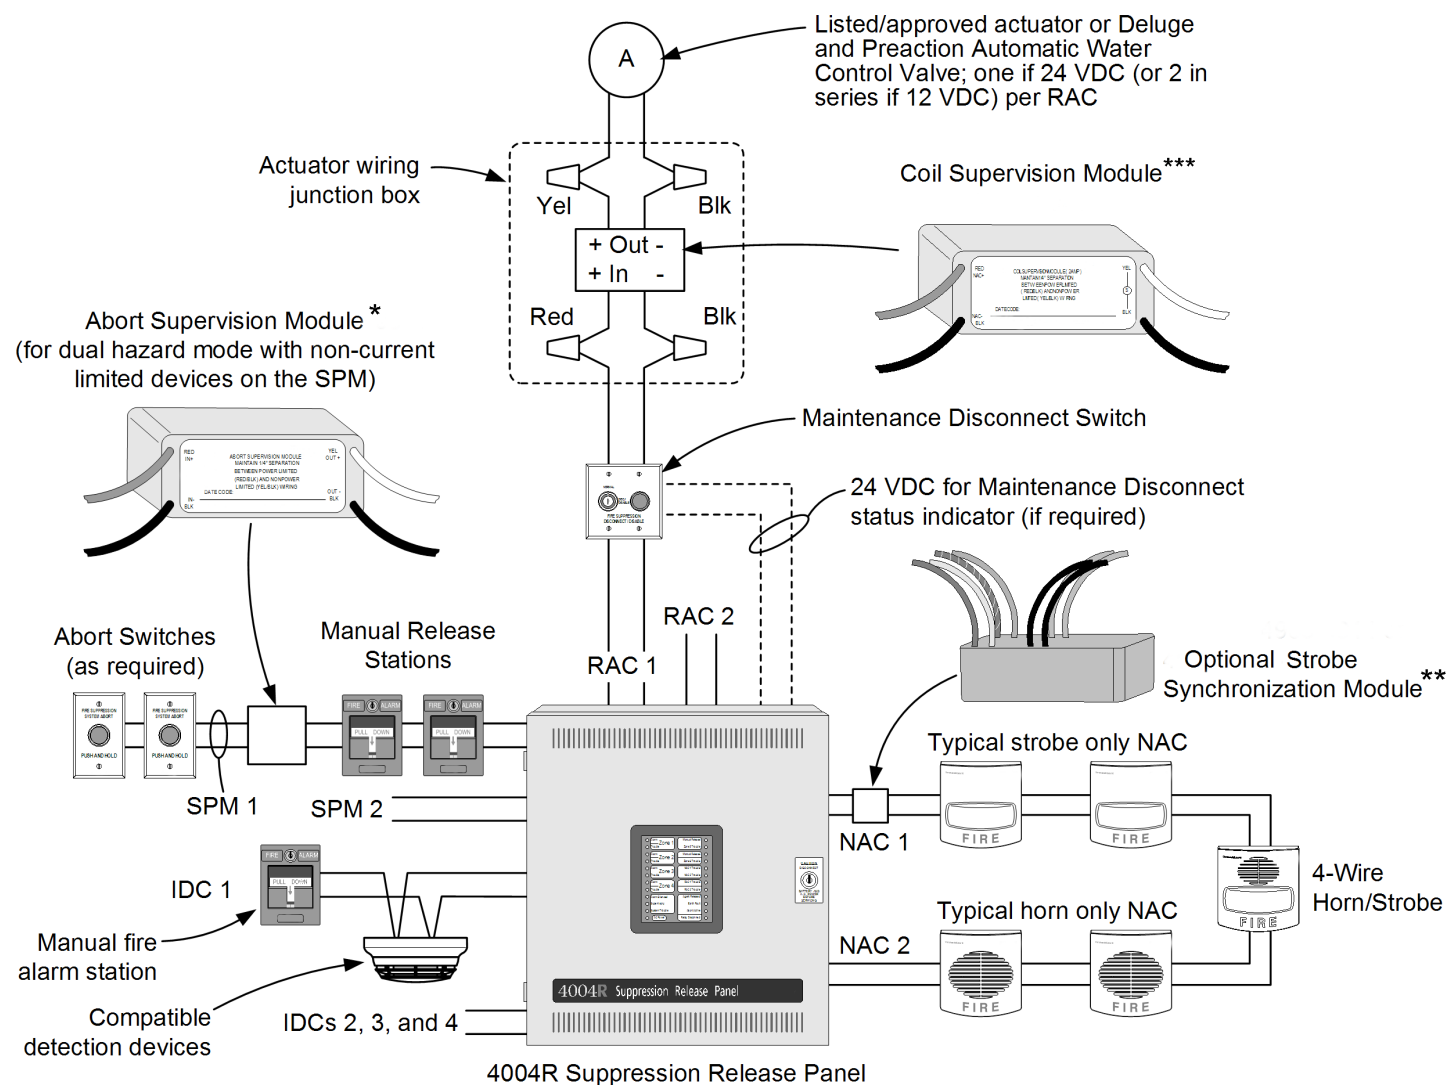

### GENERAL WIRING NOTE:

Wiring shown is for reference only, refer to installation instructions for detailed wiring information.


Figure 4: 4004R System Connection Reference

\* The A2081-9048 Abort Supervision Module is shown.

\*\* There are two Optional Strobe Synchronization Modules: A4905-9914 or A4905-9922.

\*\*\* The A2081-9046 Coil Supervision Module is shown.

## Mounting Reference Information

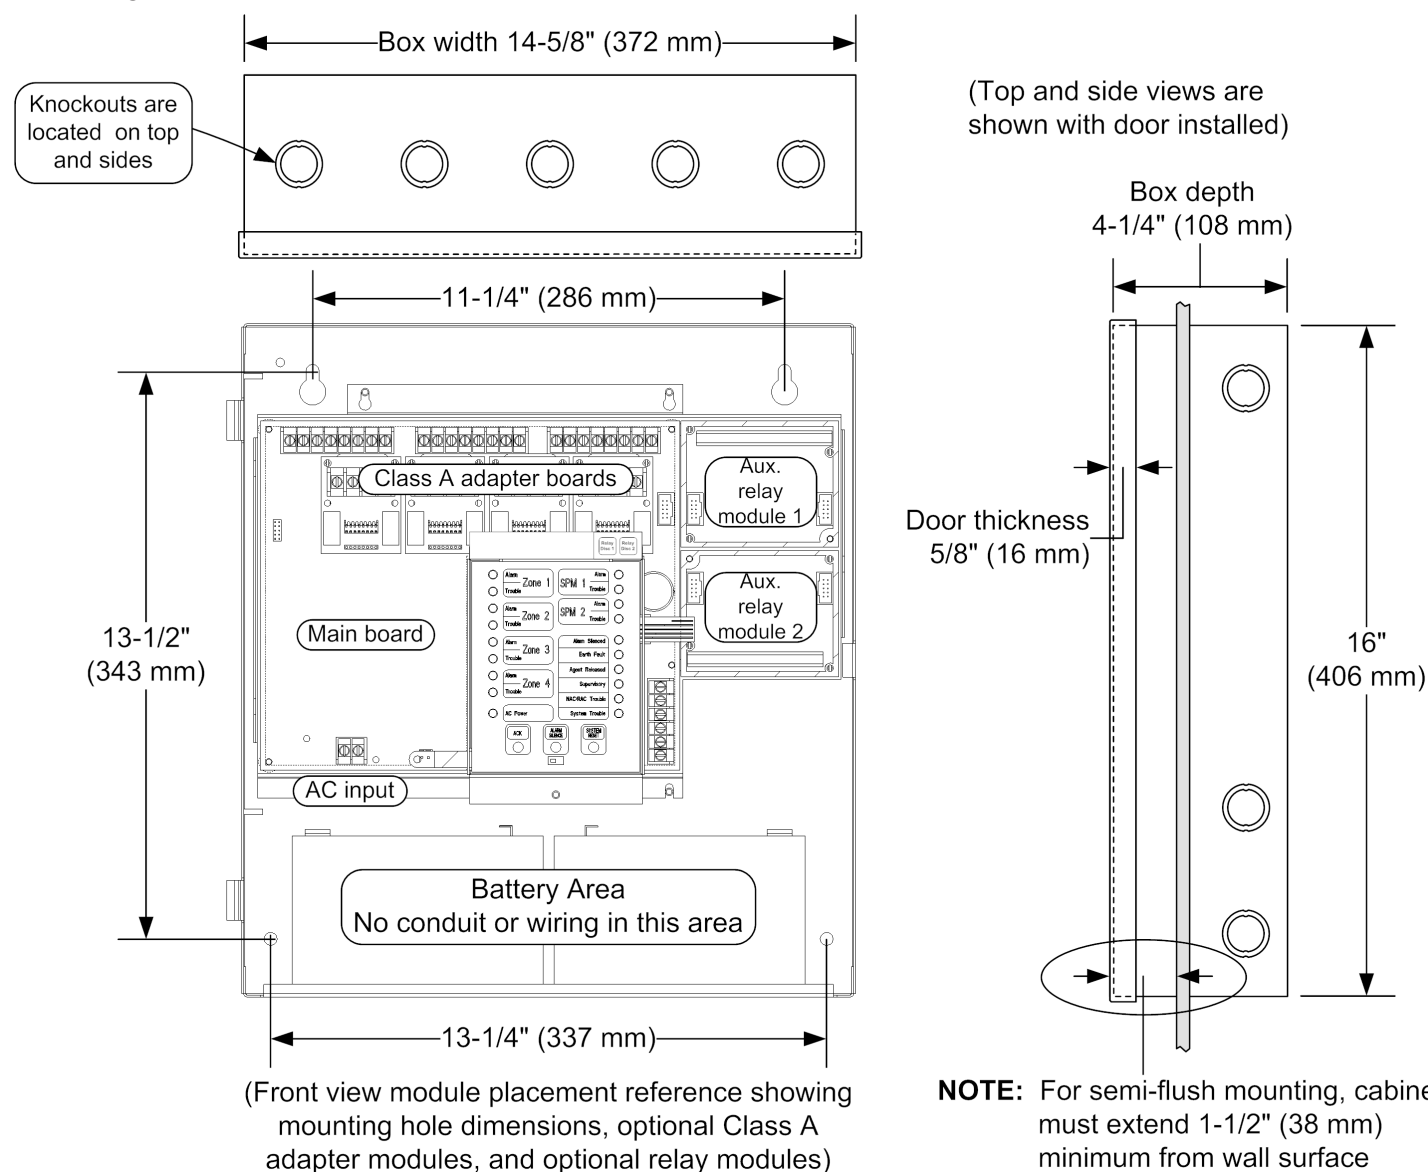

### Note:

A system ground must be provided for Earth Detection and transient protection devices. This connection shall be made to an approved, dedicated Earth connection per NFPA 70, Article 250, and NFPA 780.