

Features

Individually addressable manual fire alarm stations with:

- Power and data supplied via IDNet addressable communications using a single wire pair
- Operation that complies with ADA requirements
- Visible LED indicator that flashes during communications and is on steady when the station has been activated
- The NO GRIP Single Action Station and Retrofit Kit are available with a more easily operated pull lever for applications where anticipated users may find the standard station lever difficult to activate
- Pull lever that protrudes when alarmed
- Break-rod supplied (use is optional)
- Models are available with single or double action (breakglass or push) operation
- UL listed to Standard 38

Compatible with the following Autocall control panels:

- Model Series 4007ES, 4010ES, 4100ES fire alarm control panels equipped with IDNet communications

Compact construction:

- Electronics module enclosure minimizes dust infiltration
- Allows mounting in standard electrical boxes
- Screw terminals for wiring connections

Tamper resistant reset key lock (keyed same as Autocall fire alarm cabinets)

Multiple mounting options:

- Surface or semi-flush with standard boxes or matching Autocall boxes
- Flush mount adapter kit
- Adapters are available for retrofitting to commonly available existing boxes

Description

The Autocall addressable manual station combines the familiar Autocall manual station housing with a compact communication module that is easily installed to satisfy demanding applications. Its integral individual addressable module (IAM) constantly monitors status and communicates changes to the connected control panel via IDNet communications wiring.

Operation

Activation of the A4099-9004 single action manual station requires a firm downward pull to activate the alarm switch. Completing the action breaks an internal plastic break-rod (visible below the pull lever, use is optional). The use of a break-rod can be a deterrent to vandalism without interfering with the minimum pull requirements needed for easy activation. The pull lever latches into the alarm position and remains extended out of the housing to provide a visible indication.

Single Action NO GRIP Station A4099-9021. For applications such as California Building Code, Title 24, which requires "Controls and operating mechanisms shall be operable with one hand and shall not require tight grasping, pinching or twisting of the wrist" the model A4099-9021 station provides a more easily operated pull lever compared to standard stations. Retrofit of existing stations is available using the A4099-9805 Retrofit kit.


Double Action Stations (Breakglass) require the operator to strike the front mounted hammer to break the glass and expose the recessed pull lever. The pull lever then operates as a single action station.




A4099-9004 Single action




A4099-9021 NO GRIP Single action



A4099-9805 NO GRIP Retrofit kit



A4099-9005 Breakglass



A4099-9006 Push



With A2099-9828 Institutional Cover kit

Double Action Stations (Push Type) require that a spring loaded interference plate (marked PUSH) be pushed back to access the pull lever of the single action station.

Station reset requires the use of a key to reset the manual station lever and deactivate the alarm switch. (If the break-rod is used, it must be replaced.)

Station testing is performed by physical activation of the pull lever. Electrical testing can be also performed by unlocking the station housing to activate the alarm switch.

Specifications

Refer to Installation Instructions 579-1135AC for additional information.

Table 1: Specifications

Specification	Rating
Power and Communications	IDNet communications, 1 address per station
Address Means	DIP switch, 8 position
Wire Connections	Screw terminal for in/out wiring, for 18 to 14 awg wire (0.82 mm ² to 2.08 mm ²)
UL Listed Temperature Range	32° to 120° F (0° to 49° C) intended for indoor operation
Humidity Range	Up to 93% RH at 100° F (38° F)
Housing Color	Red with white raised lettering
Material	Housing and pull lever are Lexan polycarbonate or equal
Pull Lever Color	White with red raised lettering
Housing Dimensions	5" H x 3 3/4" W x 1" D (127 mm x 95 mm x 25 mm)

Addressable Manual Station Semi-Flush Mounting

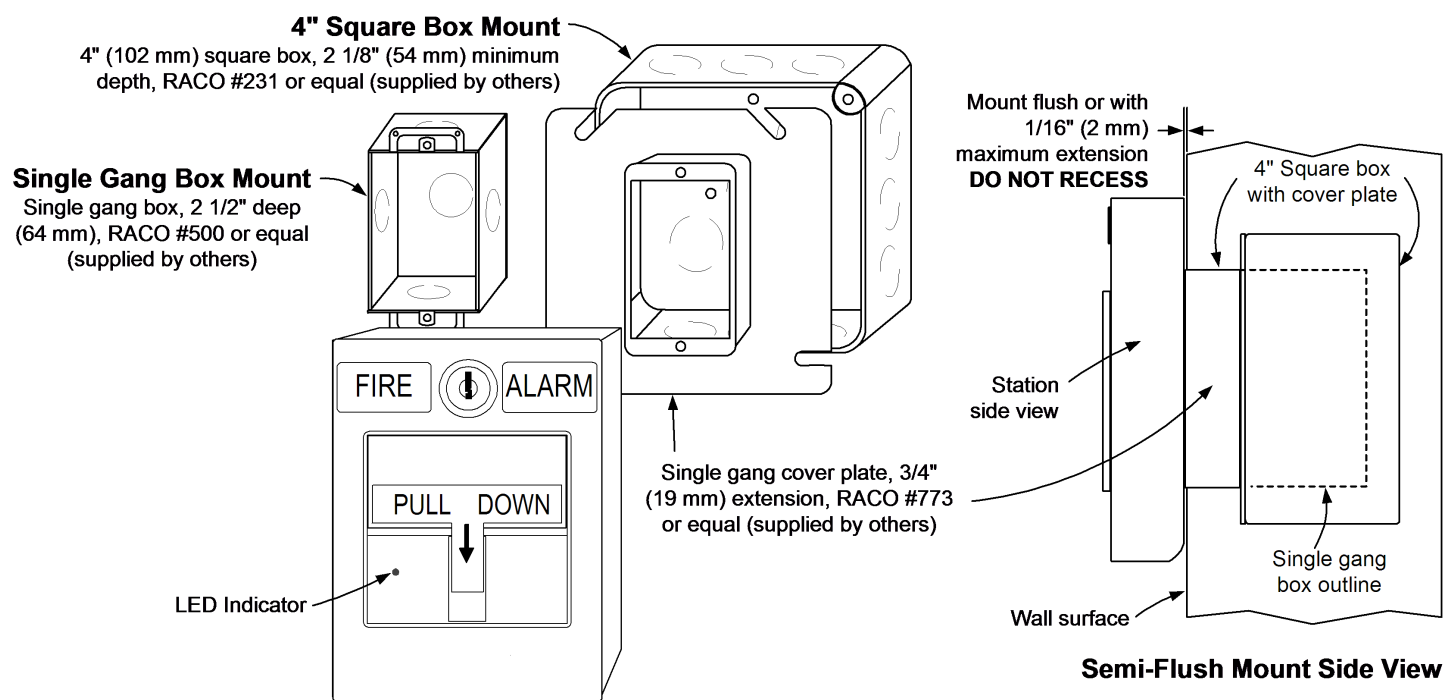


Fig 1: Addressable Manual Station Semi-Flush Mounting

Addressable Manual Stations Surface Mounting

Preferred Mounting. For surface mounting of these addressable manual stations, the preferred electrical boxes are shown in the illustration to the right.

Additional Mounting Reference. Refer to [Addressable Manual Station, Additional Mounting Information](#) on page 5 for Wiremold box mounting compatibility.

The illustration shows the 2975-9178 box and the 2975-9022 cast box.


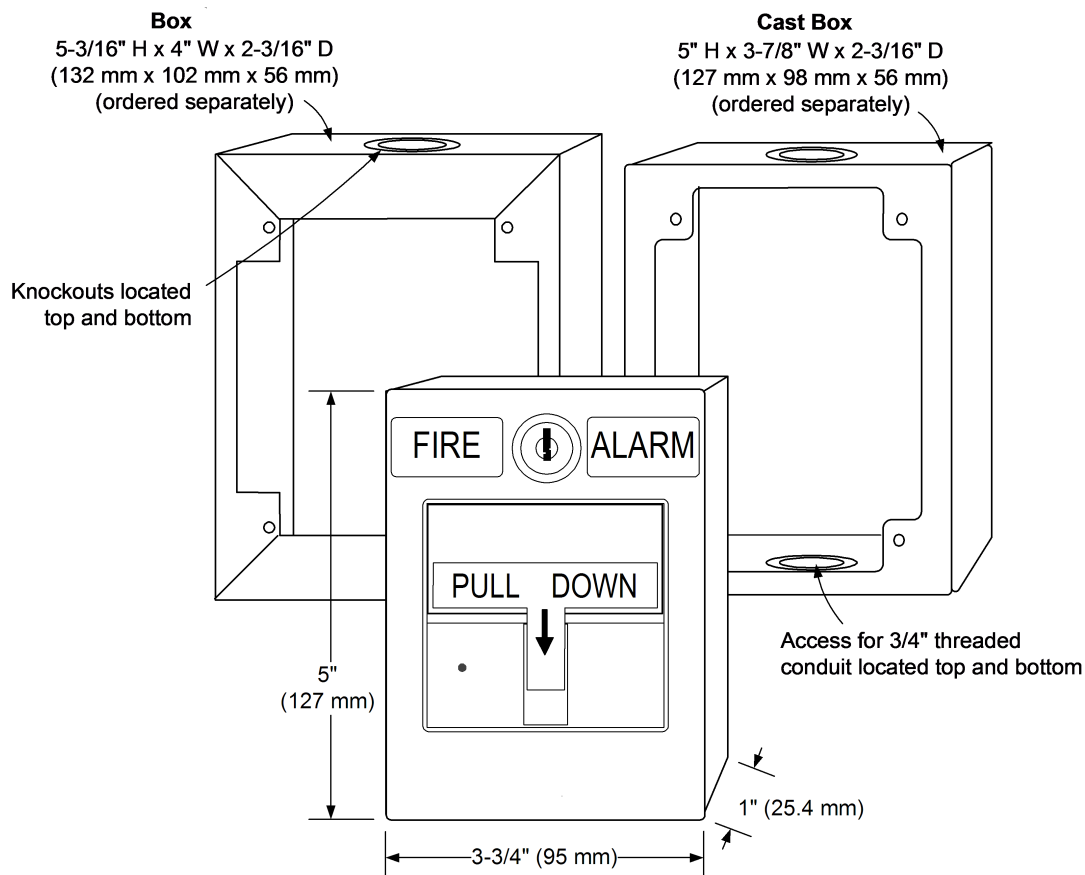


Fig 2: A4099 Series Addressable Manual Station

Surface Mount Side View with Internal Detail

The illustration shows the 2975-9178 box.

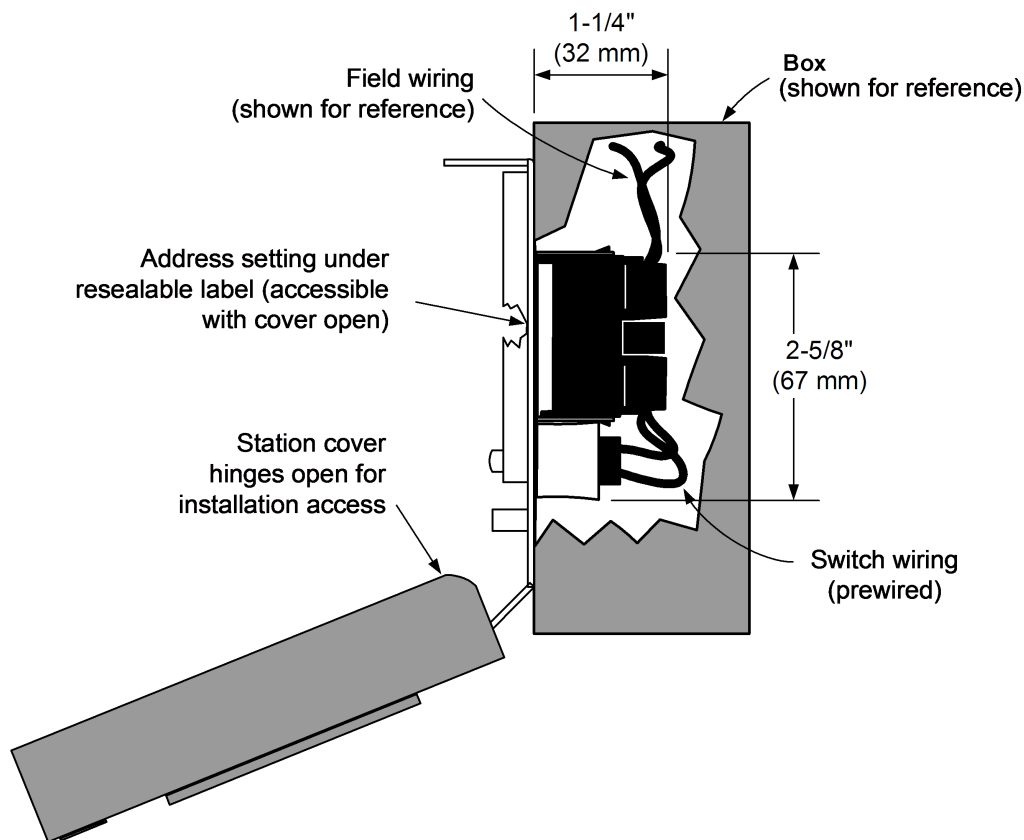


Application Reference

Refer to NFPA 72, the *National Fire Alarm and Signaling Code*, and all applicable local codes for complete requirements for manual stations. The following summarizes the basic requirements.


1. Stations shall be located in the normal path of exit and distributed in the protected area such that they are unobstructed and readily accessible.
2. Mounting shall be with the operable part not less than 42 in (1.07 m) and not more than 48 in (1.22 m) above floor level.
3. At least one station shall be provided on each floor. Additional stations shall be provided to obtain a travel distance not more than 200 ft (61 m) to the nearest station from any point in the building.
4. When manual station coverage appears limited in any way, additional stations should be installed.

Addressable Manual Station, Additional Mounting Information

For retrofit and new installations, additional compatible mounting boxes and the required adapter plates are shown in the illustration. The illustration shows the 2099-9814 surface trim for Wiremold boxes and the 2099-9813 semi-flush trim for 2 gang switch boxes.

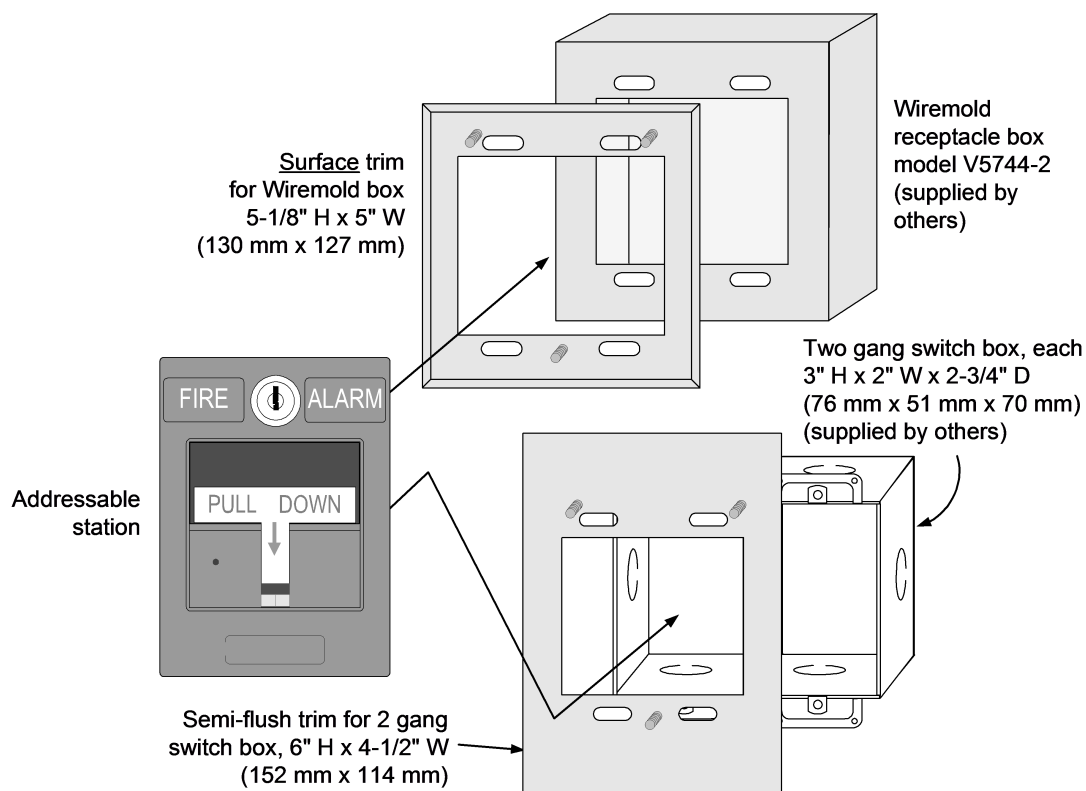

Addressable Manual Station, Flush Mounting Information

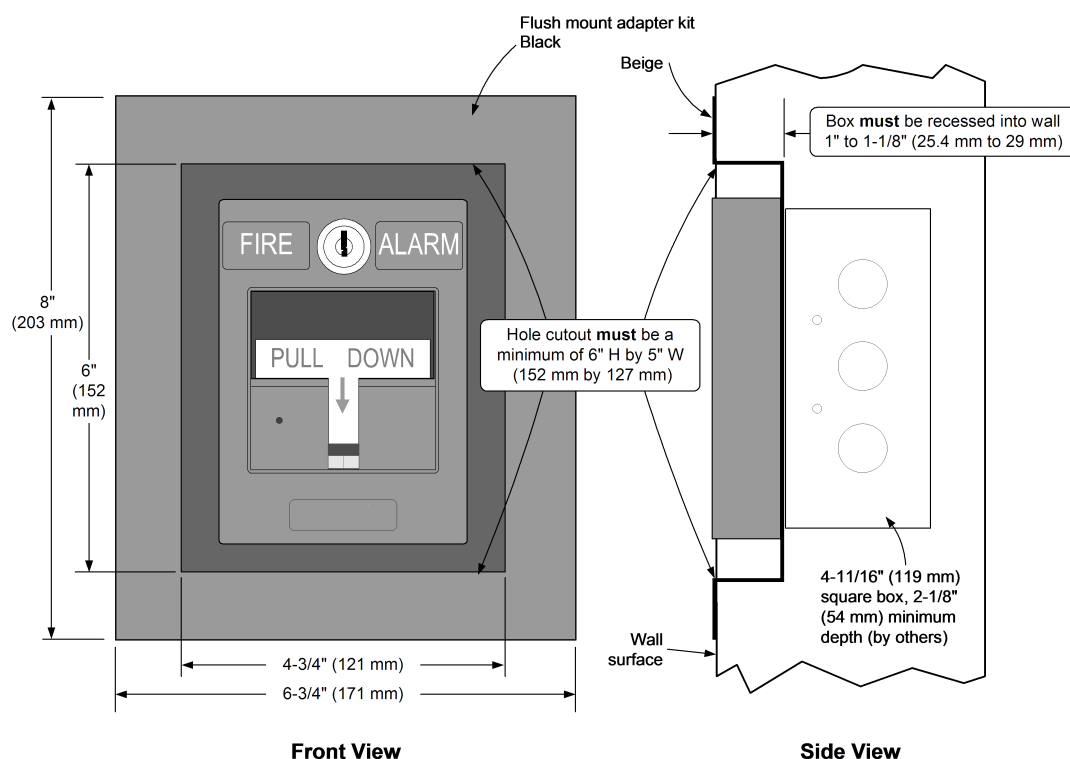

The flush mount adapter kit is available in beige (2099-9820) or black (2099-9819).

Addressable Manual Station Product Selection

Table 2: Addressable Manual Station Product Selection Red Housing with White Letters and White Pull Lever

SKU	Description	Housing	Pull Lever	Listings
A4099-9004	Single Action, English	FIRE ALARM	PULL DOWN	UL, ULC
A4099-9004CB	Single Action, Bilingual English and French	FEU FIRE	TIREZ PULL	ULC
A4099-9004CF	Single Action, French	ALARME FEU	ABAISSÉZ	
A4099-9004PO	Single Action, Portuguese	FOGO ALARME	PUXE	UL
A4099-9004SP	Single Action, Spanish	ALARMA FUEGO	JALE	
A4099-9005	Double Action, Breakglass operation, English	FIRE ALARM	PULL DOWN	UL, ULC
A4099-9005PO	Double Action, Breakglass operation, Portuguese	FOGO ALARME	PUXE	UL
A4099-9005SP	Double Action, Breakglass operation, Spanish	ALARMA FUEGO	JALE	
A4099-9006	Double Action, Push operation, English	FIRE ALARM	PUSH PULL DOWN	UL, ULC
A4099-9006PO	Double Action, Push operation, Portuguese	FOGO ALARME	EMPURRE PUXE	UL
A4099-9006SP	Double Action, Push operation, Spanish	ALARMA FUEGO	EMPUJE JALE	
A4099-9021	Single Action NO GRIP operation, English	FIRE ALARM	PULL DOWN	UL, ULC

Table 3: Accessories

SKU	Description
2975-9022	Cast aluminum surface mount box, red
2975-9178	Surface mount steel box, red
2099-9813	Semi-flush trim plate for double gang switch box, red
2099-9819	Flush mount adapter kit, black
2099-9820	Flush mount adapter kit, beige
A4099-9805	Retrofit Kit for field conversion of a single action station to a NO GRIP station; refer to Installation Instructions 579-1007AC for details
2099-9803	Replacement breakglass
2099-9804	Replacement break-rod
A2099-9828	Institutional cover kit for field installation on A4099-9004; Note: Covers LED indicator
2099-9814	Surface trim plate for Wiremold box V5744-2, red
2099-9822	Replacement retaining clip for breakglass